


### Supurr-Duct<sup>®</sup> 4" Aluminum Flexible Metallic Duct - UL Listed, Clothes Dryer Transition Duct

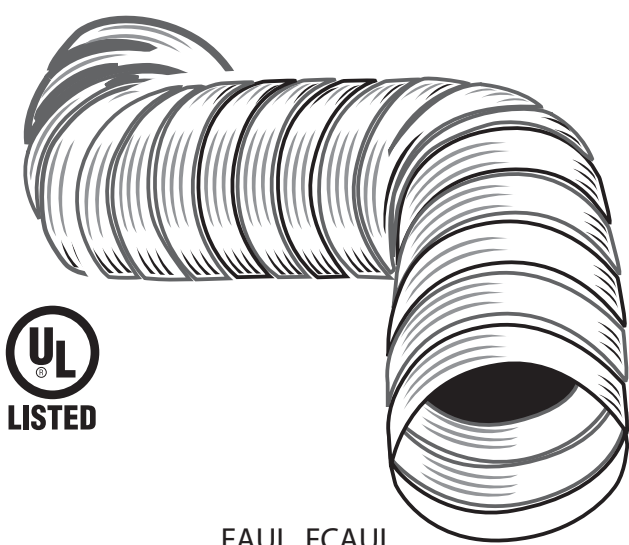

FAUL, FCAUL

Model No.	Description
FAUL0405	Supurr-Duct <sup>®</sup> Dryer Transition Duct
FAUL0408	Supurr-Duct <sup>®</sup> Dryer Transition Duct
FCAUL0405	Supurr-Duct <sup>®</sup> Dryer Transition Duct w/ Clamps
FCAUL0408	Supurr-Duct <sup>®</sup> Dryer Transition Duct w/ Clamps

#### Performance Data

for uninsulated aluminum flexible duct

#### Maximum Velocity

- 5000 FPM / 25 m/sec
- near zero permeability and leakage

#### Operating Temperature Range

- -100°F to 430°F, -73°C to 221°C intermittent

#### UL Listed Clothes Dryer Transition Duct

- meets UL Standard 2158A



#### Flame Spread/Smoke Developed

- 0/0

#### General Information

- available in 4" (101mm) dia and lengths of 5' (1.5m) and 8' (2.4m) w/ plain ends
- UL Listed on this product is for installations of 8 ft. (2.4m) or less
- best for gas or electric dryers
- flexes in any direction for easy installation
- non-combustible

#### Pressure Loss Diagram

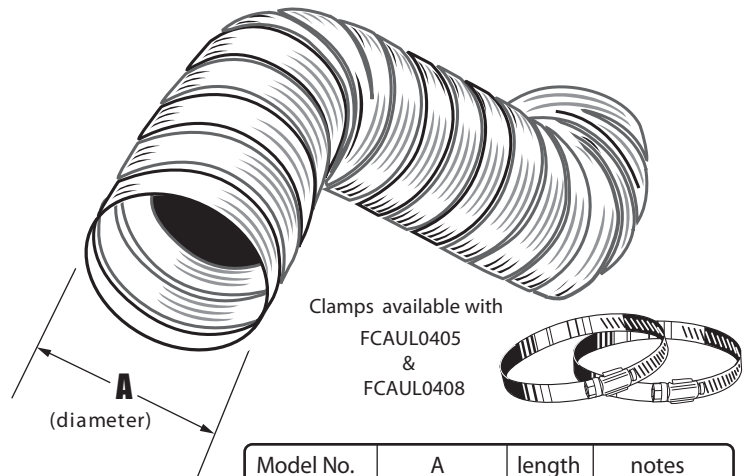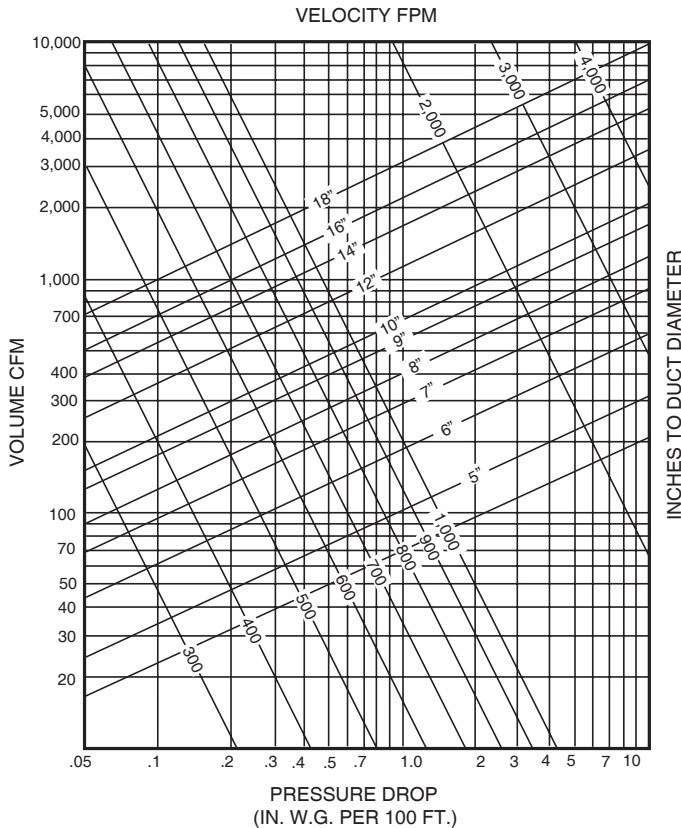

Model No.	A	length	notes
FAUL0405	4" dia. 10.2cm	5' 1.5m	
FAUL0408	4" dia. 10.2cm	8' 2.4	
FCAUL0405	4" dia. 10.2cm	5' 1.5m	with metal clamps (2)
FCAUL0408	4" dia. 10.2cm	8' 2.4m	with metal clamps (2)