


SADD - Saddle

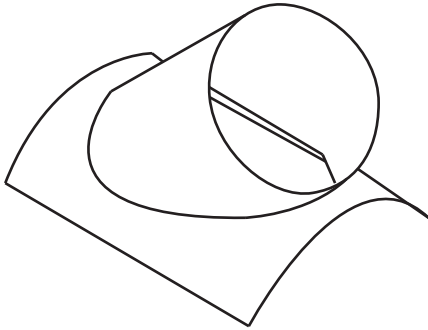

SADD

Saddle	
Model	Description
SADD328	Galvanized Pipe Saddle, 3" dia. Branch x 28ga (7.6 x .040cm)
SADD428	Galvanized Pipe Saddle, 4" dia. Branch x 28ga (10.1 x .040cm)
SADD528	Galvanized Pipe Saddle, 5" dia. Branch x 28ga (12.7 x .040cm)
SADD628	Galvanized Pipe Saddle, 6" dia. Branch x 28ga (15.2 x .040cm)
SADD728	Galvanized Pipe Saddle, 7" dia. Branch x 28ga (17.7 x .040cm)
SADD826	Galvanized Pipe Saddle, 8" dia. Branch x 28ga (20.3 x .040cm)

Performance Data

For galvanized venting

Material

- galvanized sheet metal
- 26ga & 28ga

Construction

- Spotweld/rivet

Operating Temperature Range

- -100deg. F to 430 deg. F / -73deg. C to 221 deg. C

Model No.	Dim. A	Dim. B	Dim. C	Dim. D
SADD328	3" Dia.	7"	2 3/4"	2" Rad
SADD428	4" Dia.	8"	3 1/2"	2" Rad
SADD528	5" Dia.	10 1/2"	2 1/8"	3" Rad
SADD628	6" Dia.	11"	2 3/4"	3" Rad
SADD728	7" Dia.	15"	2 1/2"	4" Rad
SADD826	8" Dia.	14"	2 3/4"	4" Rad

General Information

- longlasting galvanized steel construction
- quick and easy to install
- allows for a branch connection

