


SDR8 - Insulated Duct - Flexible duct wrapped in R8 insulation and silver metalized polyester cover - UL Listed 181 Class 1 Air Duct

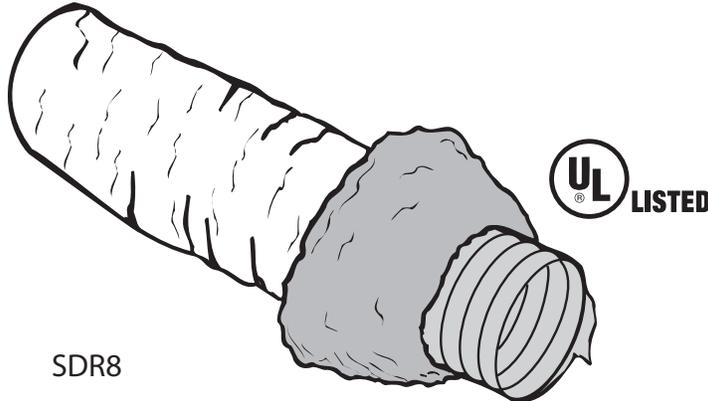

Model No.	Description
SD0625R8	6" x 25' insulated duct
SD0825R8	8" x 25' insulated duct
SD1025R8	10" x 25' insulated duct
SD1225R8	12" x 25' insulated duct

additional sizes available – call for more information

Performance Data

for insulated flexible duct

Maximum Velocity

- 5000FPM (25m/sec)

Maximum Related Pressures


- All diameters 10" W.C. (2.5 Kpa Pos.)
- All diameters .5" W.C. (.12 Kpa Neg.)

Operating Temperature Range

- 0 °F to 266 °F (-18 C to 130 C Intermittent)

General Information

- ideal for long run applications of HVAC in accordance with local building codes
- 25ft. (7.6m) compresses to 30" (76cm)
- flexible steel wire helix
- polyester film with approved bonding agent
- no installation length limitation
- Thermal certification with ADC standard
- Flame / Smoke Ratings : 25/50

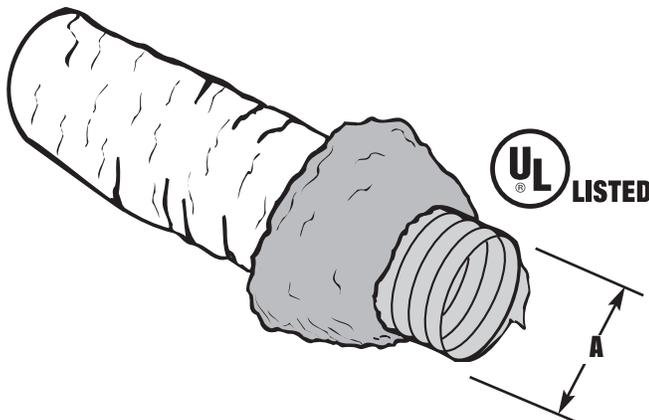

Model No.	A	length
SD0625R8	6" dia. (15.2cm)	25ft (7.6m)
SD0825R8	8" dia. (20.3cm)	25ft (7.6m)
SD1025R8	10" dia. (25.4cm)	25ft (7.6m)
SD1225R8	12" dia. (30.5cm)	25ft (7.6m)



Thermal Performance